


# AT-X80Q

True Wireless Earphones

Designed in Japan  
アイワ株式会社

## Product Overview

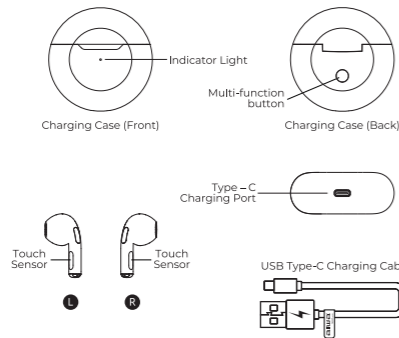

## Unboxing

- AT-X80Q Earbuds
- Portable Charging Case
- USB Type-C Charging Cable
- User's Manual

Please refrain from using any damaged components. Contact your local authorized AIWA distributor/customer service should you need any assistance.

## Product Specifications

Model Number: AT-X80Q  
BT Version: V5.1  
Rated Power: 4mW  
Frequency Response: 20~20kHz  
Impedance: 32Ω ± 15%  
Sensitivity: 104dB ± 3dB  
Supported Profiles: HSP/HFP/A2DP/AVRCP  
Transmission Distance (Estimated): 10 Meters (No Obstacles)  
Water resistant: IPX4  
Battery (Earbuds): 3.7V/25mAh  
Battery (Charging Case): 3.7V/200mAh  
Playback/ Call Time: 4-5 Hours  
Earbuds Standby Time: 60 Hours  
Charging Case Standby Time: 70 Days  
Charging Time (Portable Case): 2.5 Hours  
Charging Time (Earbuds): 1.5 Hours  
Earbuds Weight: 3g each  
Charging Case Weight: 27g

The above are estimated values tested in a practical environment and may vary upon individual usage habits. Charging case holds approximately 2-3 charges of earbud's full battery capacity depending on playback volume.

## Product Usage Guide

### Manual ON/OFF:

Power ON: Flip open charging case to power up earbuds.  
\*Make sure earphones are fully charged before using them for the first time

Power OFF: Place earbuds back into charging case and close the lid.  
\*AT-X80Q automatically powers off after 3 minutes of disconnection

### Music Control:

Play/Pause: Click touch sensor once (1)  
Next Song: Click touch sensor twice (2)  
Previous Song: Click touch sensor thrice (3)

### Call Control:

Answer/Hang Up: Click L or R side touch sensor once (1)  
Reject Call: Click L or R side touch sensor twice (2)

### Voice Assistant:


Activate Voice Assistant: Long press touch sensor for three (3) seconds

### Press multi-function button on the charging case once (1):

Battery level above 5%: Indicator light will light up in solid green.

Battery level below 5%: Indicator light will flash in green.

## Connecting the Product

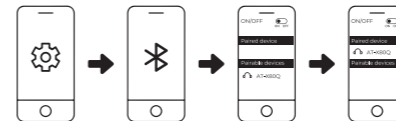

1. Turn on Bluetooth (BT) on your mobile device.
2. Turn on Earbuds (Flipping open charging case will power up earbuds).
3. Search and connect to "AT-X80Q" from your mobile device.

Upon opening charging case lid, AT-X80Q will automatically connect to last paired device.

## Troubleshooting

Only one (1) side earbud can be heard/ disconnects/ unable to connect even after successful connection to your device.

**Solution:** Disconnect both earbuds from mobile device. Place them back into the charging case and close the lid. Wait for five (5) seconds then open the case to re-attempt connection.

## Battery & Charging

Charging Earbuds (Place them back into charging case):  
Charging:\*Green Indicator Light remains lit up\*  
Full Charge:\*Extinguished Indicator Light\*  
Approximate charging time: 1.5 Hours

### Charging the Portable Charging Case (Plug in USB - C Charging Cable):

Charging:\*Flashing Orange Indicator Light\*  
Full Charge:\*Orange Indicator Light remains lit up\*  
Approximate charging time: 2.5 Hours